

# TAVILINE ACOUSTIC PANEL—P29/3 - 16

## DATA SHEET

## Architectural Specifications

### PRODUCT

**TAVILINE P29/3 - 16** is a grooved acoustic panel, giving a very uniform linear appearance when used as wall or ceiling treatment.

The Taviline panels are made up of an **MDF core** sandwiched between a **surface layer** of real wood veneer, melamine or paint and an **acoustic fleece**

### DIMENSIONS

**Perforation Face:** Grooved 3mm every 29mm

**Rear Boring:** D10 at 16mm centre

**Open Area :** 4,7%

**Thickness:** 16mm

**Weight:** 11,5 kg / m<sup>2</sup>

**Standard sizes:**

Planks - 2400 x 192mm ( Standard )

Panels - 600 x 600, 1200 x 600, 2400 x 600



### MATERIAL SOURCE

All material used in the production of **WoodcomGSV** panels are from **European sources**. All manufacturing is done in the factory in Spain to the highest quality norms.


Our wood product components are sourced from providers with environmentally friendly practices and were required or request we supply certified materials; **PEFC and FSC Mdf & Veneers**.

### EDGE DETAIL

The **TAVILINE** range of panels are machined with a specific T&G profile to suit our T-Clip™ fixing bracket.

A range of edge profiles are available to suit the designers / architects' preferred look and installation ;

**TG 03** - Tongue & G with 3mm Gap



**RV 20** - Reveal, 20mm Shadow Gap



**TGV 02** - Tongue & Groove V Joint



**TBV 03** - Bevelled Joint 3mm Gap



**BEECH VENEER - NATURAL**



### FINISHES

The **TAVILINE** acoustic panels are available in a varying range of surface finishes from real wood veneers, melamine and HPL to high quality painted surfaces.

#### Real Wood Veneers

- All wood species - First quality

#### Man made veneers

- Reconstituted veneers - Good colour match

#### Melamine

- Wood grain, Solid colours - Budget

#### Laminates ( HPL )

- Wood grain , Solid colours - High wear

#### Paint

- Matt, Semi-Matt & Gloss - Design



### APPLICATIONS

The **TAVILINE P29/3 - 16** panel is designed for use in **areas requiring a high level of sound absorption** as acoustic treatment.

Conference Centres  
Airports Universities  
Multi purpose halls

Auditoria Banquet Halls  
Hotels Restaurants  
Theatres Leisure Centres


# TAVILINE ACOUSTIC PANEL - P29/3 - 16

## DATA SHEET



### Acoustic Performance

### Absorption rating - HIGH

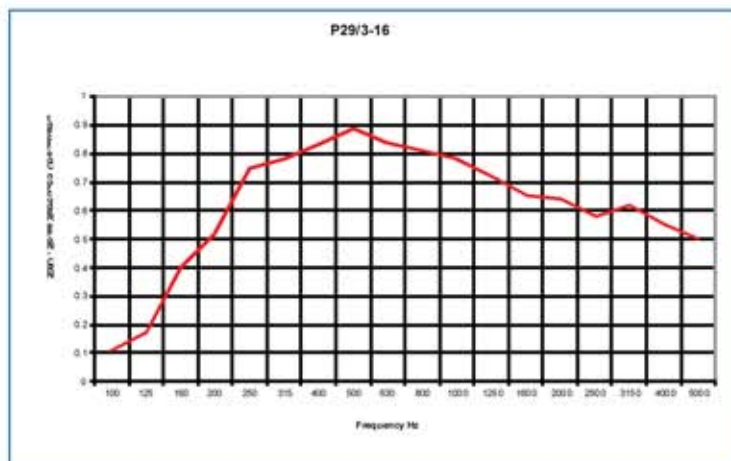


125	250	500	1000	2000	4000	NRC
0.17	0.75	0.89	0.78	0.64	0.55	0.77

**NRC Value: 0.77**  
**Absorption: Class C**

### ACOUSTIC ABSORPTION

The unique design and perforation type, size and quantity make the TAVILINE P29/3 - 16 a absorbent panel often difficult to achieve in wood panels.

Very good universal absorber from the lower to mid frequency ranges.



#### Acoustic Panel Specifications;

Panels are tested in a laboratory using 40mm of acoustic insulation, 70kg/m<sup>3</sup> and with an air gap of 45mm.

Area Grooved Face : 7,5%

Area Perforated Back : 12,2%

Open area to sound : 4,7%

### Technical Specifications

#### INSTALLATION

Our **TAVILINE** panels are **designed for ease of installation** using WoodcomGSV fixing **T-CLIPS®** on standard wall battens and suspended ceiling rails.

Products are to be installed to manufacturers recommendations by experienced installers.



by experi-

Material should rest for 2 to 3 days prior in the site conditions before carrying out the installation work. In new buildings with fresh concrete and plaster, installation should not be carried out until the relative humidity has equalised. An expansion joint of 2-3mm should be allowed for every 7 meters.

When the finish is veneer - a natural product with inherent variations, panels should be selected for colour and grain matching prior to installation.

#### TECHNICAL ADVICE

Our qualified installation and acoustic engineers are available to assist with technical advice on specifications and installation requirements at [info@woodcomgsv.com](mailto:info@woodcomgsv.com).

#### HANDLING AND STORAGE

TAVILINE acoustic panels should be stored in a dry environment, flat and covered to protect them from dust and dirt. Package should be opened and panels allowed to acclimatize prior to installation.

As these are **finished products** care should be taken in handling to prevent scratching and breakage.

#### FIRE PERFORMANCE - HIGH

The core material used in Fire Rated panels is **Euroclass Bs2d0 Mdf**. When veneer is the finish we also use a fire retardant lacquer, Euroclass Bs2d0.

#### IMPACT RESISTANCE - HIGH

Medium density fibreboard panels used in our acoustic products are impact resistant and ideally **suited for use in high traffic areas** such as corridors and lecture theatres in schools, universities and public spaces.





